## Fibre Products- Short Form Pluggables

## SFP 813M-002D



### Gigabit – Multi Mode 2km – 1310 nm

#### **Features**

- Compliant with IEEE802.3z Gigabit Ethernet Standard
- Compliant with Fiber Channel 100-M5-SN-1 & 100-M6-SN-1 standard
- Industry standard small form pluggable (SFP) package
- Duplex LC connector
- Differential LVPECL inputs and outputs
- Single power supply 3.3V
- TTL signal detect indicator
- Hot Pluggable
- Class 1 laser product complies with EN 60825-1
- Extended Temperature Option -40C to +85C



#### **Application**

- Distributed multi-processing
- Switch to switch interface
- High speed I/O for file server
- Bus extension application
- Channel extender, data storage

Recommended Operating Conditions						
Parameter	Symbol	Min	Max	Units	Note	
		-40	+85	C	GE-MM-2K-1310W	
Supply Voltage	Vcc	3.1	3.5	V		
Supply Current	$I_{mr} + I_{mr}$		250	mΔ		

**Transmitter Electro-Optical Characteristics** 

Parameter	Symbol	Min	Type	Max	Unit	Note
Output Optical Power 9/125 um fibre	P <sub>out</sub>	-9		-1	dBm	Average
Extinction Ration	ER	9			dB	
Centre Wavelength	$l_{C}$	1270	1310	1355	nm	
Spectral Width (RMS)	Dl			4	nm	
Rise / Fall Time (20-80%)	$T_{nf}$			260	ps	
Total jitter	TJ			227	ps	
Output eye			Compliant with IEEE802.3z			
Max Pout TX-DISABLE Asserted	P <sub>OFF</sub>			-45	dBm	
Differential Input Voltage	$V_{\mathrm{DIFF}}$	0.4		2.0	V	_

**Receiver Electro-Optical Characteristics** 

Parameter	Symbol	Min	Type	Max	Unit	Note
Optical Input Power-Maximum	$P_{IN}$	-1			dBm	BER<10- <sup>12</sup>
Optical Input Power-Minimum Sensitivity)	$P_{IN}$			-19	dBm	BER<10- <sup>12</sup>
Operating Centre Wavelength	$l_{\rm C}$	1260		1610	nm	
Optical Return Loss	ORL	12			dB	
Signal Detect-Asserted	$P_A$			-19	dBm	
Signal Detect-De-asserted	$P_{\mathrm{D}}$	-35			dBm	
Differential Output Voltage	DIFF	0.5		1.2	V	
Data Output Rise, fall Time (20-80%)	$T_{r,f}$			0.35	ns	
Receiver Loss of Signal Output Voltage-Low	$RX_LOS_L$	0		0.5	V	
Receiver Loss of Signal Output Voltage-High	RX_LOS <sub>H</sub>	2.4		Vcc	V	

Ordering Information					
Feature	Part Number	Fibre	Range	Wave	Temperature
SFP-GE-MM-2K-1310	8220-002	MM	2km	1310	$-40^{0}$ C to $+85^{0}$ C
<b>Note:</b> The guaranteed transmit distance is					
Multimode 62.5 / 125 Corning Fibre = 2km					

Web: www.casecomms.com Email: sales@casecomms.com

Multimode 50/125 Corning Fibre: 1Km

Telephone: +44 (0) 845 643 0800


## Fibre Products- Short Form Pluggables



## SFP 813M-002D

Absolute Maximum Ratings					
Parameter	Symbol	Min	Max	Units	Notes
Storage Temperature	Ts	-40	+85	С	
Supply Voltage	Vcc	-0.5	4.0	V	
Input Voltage	VIN	-0.5	Vcc	V	
Output Current	Io		50	mA	
Operating Current	IOP		400	mA	

#### **Block Diagram of Transceiver**

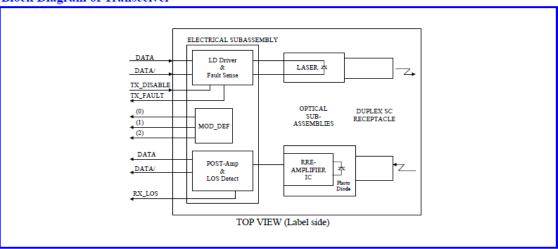

#### **Transmitter Section**

The transmitter section consists of a 1310 nm InGaAsP laser in an eye safe optical subassembly (OSA) which mates to the fiber cable. The laser OSA is driven by a LD driver IC which converts differential input LVPECL logic signals into an analog laser driving current.

#### TX\_DISABLE

The TX\_DISABLE signal is high (TTL logic "1") to turn off the laser output. The laser will turn on when TX\_DISABLE is low (TTL logic "0").


#### **Receiver Section**

The receiver utilizes an InGaAs PIN photodiode mounted together with a trans-impedance preamplifier IC in an OSA. This OSA is connected to a circuit providing post-amplification quantization, and optical signal detection.

#### Receive Loss (RX\_LOS)

The RX\_LOS is high (logic "1") when there is no incoming light from the companion transceiver. This signal is normally used by the system for the diagnostic purpose. The signal is operated in TTL level.

#### **Assembly Details**

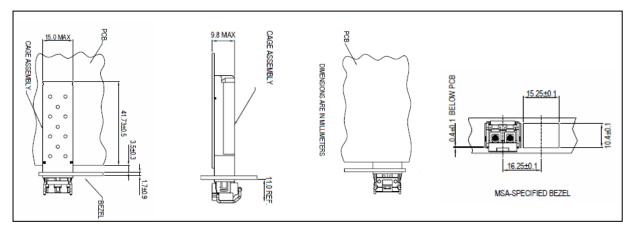


Web: www.casecomms.com Telephone: +44 (0) 845 643 0800

Email: sales@casecomms.com

## Fibre Products- Short Form Pluggables SFP 813M-002D



Pin	Signal Name	Description
1	$T_{GND}$	Transmit Ground
2	TX_FAULT	Transmit Fault
3	TX_DISABLE	Transmit Disable
4	MOD_DEF(2)	SDA Serial Data Signal
5	MOD_DEF (1)	SCL Serial Clock Signal
6	MOD_DEF (0)	TTL Low
7	RATE SELECT	Open Circuit
8	RX_LOS	Receiver Loss of Signal, TTL High, open collector
9	$R_{GND}$	Receiver Ground
10	$R_{GND}$	Receiver Ground
11	$R_{GND}$	Receiver Ground
12	RX-	Receive Data Bar, Differential PECL, ac coupled
13	RX+	Receive Data, Differential PECL, ac coupled
14	$R_{GND}$	Receiver Ground
15	$V_{CCR}$	Receiver Power Supply
16	$V_{CCT}$	Transmitter Power Supply
17	$T_{GND}$	Transmitter Ground
18	TX+	Transmit Data, Differential PCEL, ac coupled
19	TX-	Transmit Data Bar, Differential PCEL, ac
		coupled
20	$T_{GND}$	Transmit Ground



PIN 10

# Dimensions 8.00 45.00 DIMENSIONS ARE IN MILLIMETERS ALL DIMENSIONS ARE ± 0.2mm UNLESS OTHERWISE SPECIFIED Unit: mm

**Class 1 Laser Product Complies with** 21 CFR 1040.10 and 1040.11

#### **Eye Safety Mark**

The GE-SM series single mode transceiver is a class 1 laser product. It complies with EN 60825-1 and FDA 21 CFR1040.10 and 1040.11. In order to meet laser safety requirements the transceiver shall be operated within the Absolute Maximum Ratings.

#### Caution

All adjustments have been done at the factory before the shipment of the devices. No maintenance and user serviceable part is required. Tampering with and modifying the performance of the device will result in voided product warranty.

Web: www.casecomms.com Telephone: +44 (0) 845 643 0800 Email: sales@casecomms.com